



## PC - 100 LIGHT DUTY PARTICLE DOOR CORE

3/4" Hardwood Stiles with 1-3/8" Top & Bottom Rails

### Rails:

LSL (Laminated Engineered Strand Lumber)  
Door Width x 1-3/8" Trimmed

### Door Core:


Solid Particleboard Wood Door Core  
28-32lbs/sqft Density

### Outer Stiles:

Solid Face-Matching Hardwood 8% Kiln Dried Lumber  
Door Height x 3/4" Trimmed

### Faces:

Veneer Laminated to 1/8" Backer, HPL or Hardboard

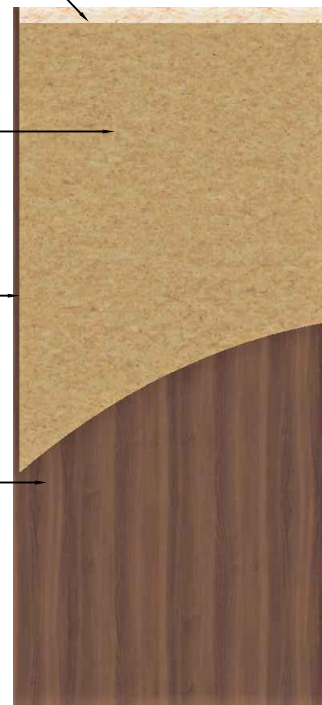

### Glue:

G 2360 - Special Suitable for Veneer, Hardboard & HPL Faces  
Approved by Georgia-Pacific, Lexington Mfg., ITS & W-H

### Thickness:

1-3/8"  
1-3/4"

### Options:

Hardware Pre-Machining  
Windows & Louvres  
20 Minute Fire Label (1-3/4" Only)

Stiles and Rails are Bonded to Each Other,  
to Core & Faces. (IE: Non-Floating Core)