



PC - 300 HEAVY DUTY PARTICLE DOOR CORE

3/4" Hardwood Stiles with 1-1/8" Inner LSL Stiles 1-3/8" Top & Bottom Rails

Rails:

LSL (Laminated Engineered Strand Lumber)
Door Width x 1-3/8" Trimmed

Door Core:

Solid Particleboard Wood Door Core
28-32lbs/sqft Density

Inner Stiles:


LSL (Laminated Engineered Strand Lumber)
Door Height x 1-1/8"

Outer Stiles:

Solid Face-Matching Hardwood 8% Kiln Dried Lumber
Door Height x 3/4" Trimmed

Faces:

Veneer Laminated to 1/8" Backer, HPL or Hardboard

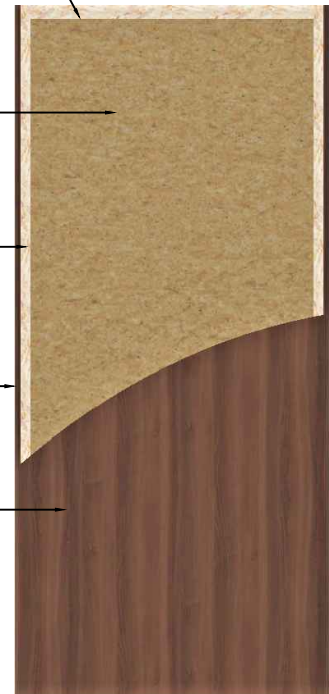

Glue:

G 2360 - Special Suitable for Veneer, Hardboard & HPL Faces
Approved by Georgia-Pacific, Lexington Mfg., ITS & W-H

Thickness:

1-3/8"
1-3/4"

Options:

Hardware Pre-Machining
Windows & Louvres
20 Minute Fire Label (1-3/4" Only)

Stiles and Rails are Bonded to Each Other, to Core & Faces. (IE: Non-Floating Core)