



PC - 500

EXTRA HEAVY DUTY

PARTICLE DOOR CORE

3/4" Hardwood Stiles with 4" Inner LSL Stiles & 3-3/4" Top & Bottom Rails

Rails:

LSL (Laminated Engineered Strand Lumber)
Door Width x 3-3/4" Trimmed

Door Core:

Solid Particleboard Wood Door Core
28-32lbs/sqft Density

Inner Stiles:


LSL (Laminated Engineered Strand Lumber)
Door Height x 4"

Outer Stiles:

Solid Face-Matching Hardwood 8% Kiln Dried Lumber
Door Height x 3/4" Trimmed

Faces:

Veneer Laminated to 1/8" Backer, HPL or Hardboard

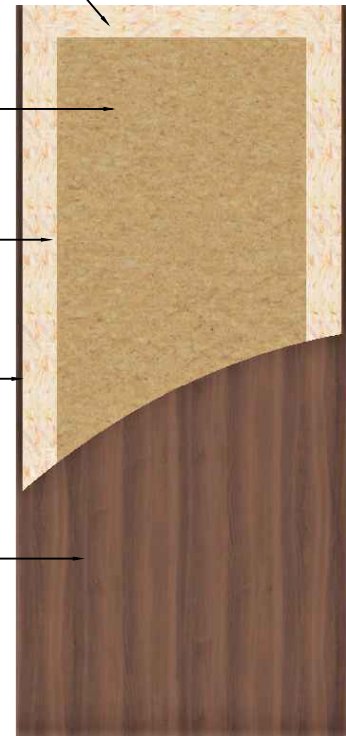

Glue:

G 2360 - Special Suitable for Veneer, Hardboard & HPL Faces
Approved by Georgia-Pacific, Lexington Mfg., ITS & W-H

Thickness:

1-3/4"

Options:

Hardware Pre-Machining
Windows & Louvres
20 Minute Fire Label (1-3/4" Only)

Stiles and Rails are Bonded to Each Other,
to Core & Faces. (IE: Non-Floating Core)

Oct 2019