



PC - 700

EXTREME HEAVY DUTY

LSL DOOR CORE

3/4" Hardwood Stiles with Solid LSL Door Core Integrating Inner Stiles & Rails

Rails:

LSL (Laminated Engineered Strand Lumber)
Integrated Part of Solid LSL Door Core

Door Core:

Solid LSL (Laminated Engineered Strand Lumber) Door Core
Structural Composite Lumber
38lb Density

Inner Stiles:


LSL (Laminated Engineered Strand Lumber)
Integrated Part of Solid LSL Door Core

Outer Stiles:

Solid Face-Matching Hardwood 8% Kiln Dried Lumber
Door Height x 3/4" Trimmed

Faces:

Veneer Laminated to 1/8" Backer, HPL or Hardboard

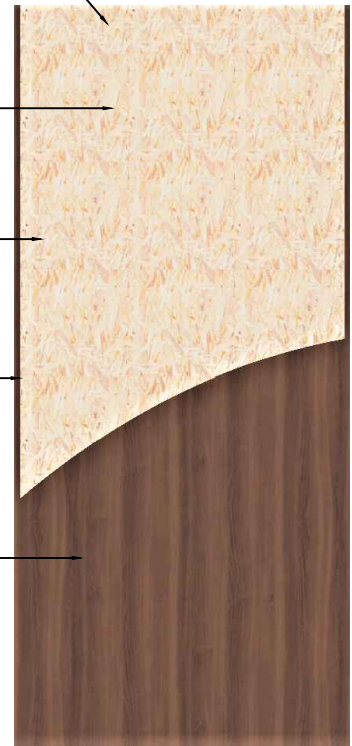

Glue:

G 2360 – Special Suitable for Veneer, Hardboard & HPL Faces
Approved by Georgia-Pacific, Lexington Mfg., ITS & W-H

Thickness:

1-3/4"

Options:

- Hardware Pre-Machining
- Windows & Louvres
- 20 Minute Fire Label (1-3/4" Only)

Stiles and Rails are Bonded to Each Other, to Core & Faces. (IE: Non-Floating Core)

Oct 2019